


**DOT/UNITED NATIONS  
Performance Oriented Packaging Certification**

**PriorityPlastics** 

**3H1 PERIODIC RETEST**

**7947 2.5 Gallon Rectangle 63mm  
NoVent- Group II  
HDPE  
8728-201-060**

**Test Report #: 2023-03**



**3H1/Y2.0/100/\*\***

**USA /M5105**

**\*\*Insert year the packaging is manufactured**

**TESTING PERFORMED FOR:**

**PRIORITY PLASTICS, INC.**  
500 Industrial Park Rd.  
Portland, IN 47371

**TESTING PERFORMED BY:**

**Priority Plastics, Inc.**  
500 Industrial Park Rd.  
Portland, IN 47371  
**Phone:** (260) 726-7000  
**Fax:** (260) 726-8111

Certification Date: 01/19/2023

Re-Certification Date: 01/19/2024

**TABLE OF CONTENTS**

**Section I: CERTIFICATION.....3**

**Section II & V: PACKAGING DESCRIPTION / COMPONENT DRAWINGS.....4**

**Section III: TEST PROCEDURES AND RESULTS.....7**

*DROP TESTS.....7*

*LEAKPROOFNESS TEST.....8*

*HYDROSTATIC PRESSURE TEST.....9*

*DYNAMIC COMPRESSION TEST.....10*

*REGULATORY AND INDUSTRY STANDARD REFERENCES.....11*


**Section IV: MATHEMATICAL CALCULATIONS.....12**

**Section V: INDIVIDUAL LOAD VS. DEFLECTION GRAPHS AND DATA.....13**

**SECTION I: Certification**

Periodic Retest  
 2.5 Gallon Rectangle HDPE Packaging (HDPE Resin)


Priority Plastics, Inc. certifies that the packaging referenced above has passed the standards of the DEPARTMENT OF TRANSPORTATION'S TITLE 49 CFR; Performance Oriented Packaging Standards, Section 178. It is the responsibility of the end user to determine authorization for use under these regulations. The use of other packaging methods or components other than those documented in this report may render this certification invalid.

SUMMARY OF PERFORMANCE TESTS					
UN/DOT TEST	CFR REFERENCE	TEST LEVEL	TEST CONTENTS	TEST COMPLETED	TEST RESULTS
Drop	178.603	1.6 m	Windshield Fluid/Antifreeze Coolant 50/50 Diluted (WW?A)	January 21,2023	PASS
Leakproofness	178.604	20 kPa – 5 Min. 3 PSI	Empty	January 19, 2021	PASS
Hydrostatic	178.605	150 kPa – 30 Min.	Water	January 19, 2021	PASS
Stacking/ Dynamic Compression	178.606	656.5 lbs	Water	January 19, 2021	PASS
TEST REPORT NUMBERS: 2018-23, 2019-19, 2020-13, 2021-10, 2023-03					
UN MARKING: (CFR 49 – 178.503)				3H1/Y2.0/100/** USA /M5105	
PACKAGING IDENTIFICATION CODE:			3H1 (178,509)		
PERFORMANCE STANDARD:			Y (Packaging meets Packing Group II test)		
MAXIMUM PRODUCT SPECIFIC GRAVITY:			2.0		
INTERNAL TEST PRESSURE:			100 kPa		
YEAR OF MANUFACTURE:			**Insert year the packaging is manufactured		
STATE AUTHORIZING THE MARK:			USA		
PACKAGING CERTIFICATION AGENCY:			(M5105) Priority Plastics, Inc.		
PACKAGE IDENTIFICATION:			M5105		
PERIODIC RETEST DATE:			January 19 ,2024		

In the event of future changes to the above referenced test standard, it is the responsibility of Priority Plastics to determine whether additional testing or updating of past testing is necessary to verify that the packaging tested remains in compliance with those standards.

**MANUFACTURER:**  
 Priority Plastics, Inc.  
 500 Industrial Park Road  
 Portland, IN 47371

  
 Heather Smith  
 Quality Supervisor  
 Priority Plastics, Inc.  
 500 Industrial Park Rd  
 Portland, IN 47371

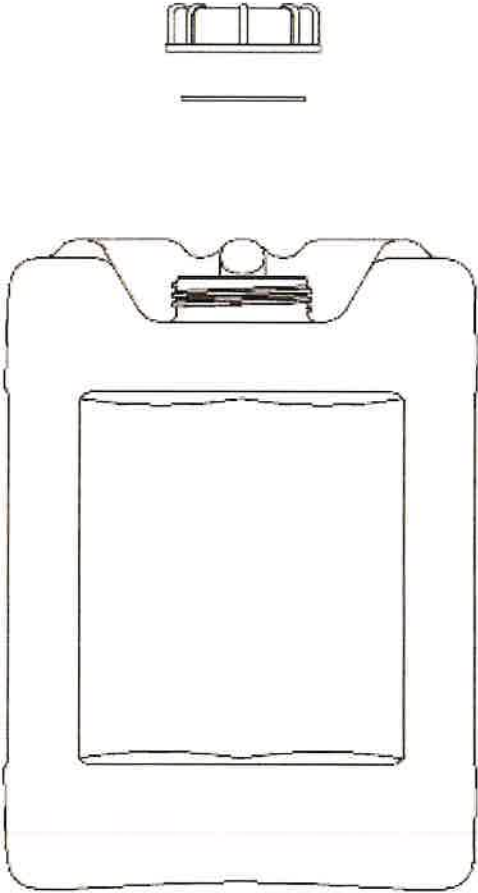
SECTION II: PACKAGING DESCRIPTION / COMPONENTS		
2.5 Gallon Rectangle, No Vent, HDPE Packaging		
	Certification Type: Periodic Retest	
	Packaging Code Designation: 3H1	
	Packing Group: II	
	Specific Gravity: 2.0	
	Hydrostatic Pressure: 100 kPa	
	<b>TEST SAMPLE PREPARATION</b> (Refer to Section IV)	
	Overall Package Tare Weight: 0.911 Kg	
	Fill Capacity (98% Overflow):	
	<ul style="list-style-type: none"> <li>• WW/A 10.060 Kg</li> <li>• Water 10.315 Kg</li> </ul>	
	Package Test Weight:	
	<ul style="list-style-type: none"> <li>• WW/A: 10.774Kg</li> <li>• Water 11.024Kg</li> </ul>	
	Calculated Package Gross Mass: 21.13 Kg (46.58 Lbs.)	
	<b>CLOSING METHODS</b>	
	Application Torque for 63mm Cap: 150- 160 In-Lbs.	
	Equipment for 63mm Cap: GP-052 & V-GP-163 B	


**COMPONENT INFORMATION**


**CLOSURE (8728-201-060)**

**Manufacturer: Miami Valley Plastics, Eldorado, OH**

<b>Description:</b> 63MM Cap with 3/4" NPT and Sure Seal 222 Slick on both sides Gasket	
<b>Priority Item Number:</b>	8728-201-060
<b>Tare Weight:</b>	25.27 Grams
<b>Closure Overall Dimensions:</b>	
• <b>Height</b>	0.862"
• <b>Diameter</b>	2.891"
<b>Finish Dimensions:</b>	
• <b>T</b>	2.430"
• <b>E</b>	2.316"
<b>Markings ( QC Audit):</b>	2, 8 ribs around the outside
<b>Liner/Gasket</b>	Sure Seal 222 Slick on both sides
<b>Identification:</b>	None
<b>Height Thickness:</b>	0.073"
<b>Diameter:</b>	2.321"

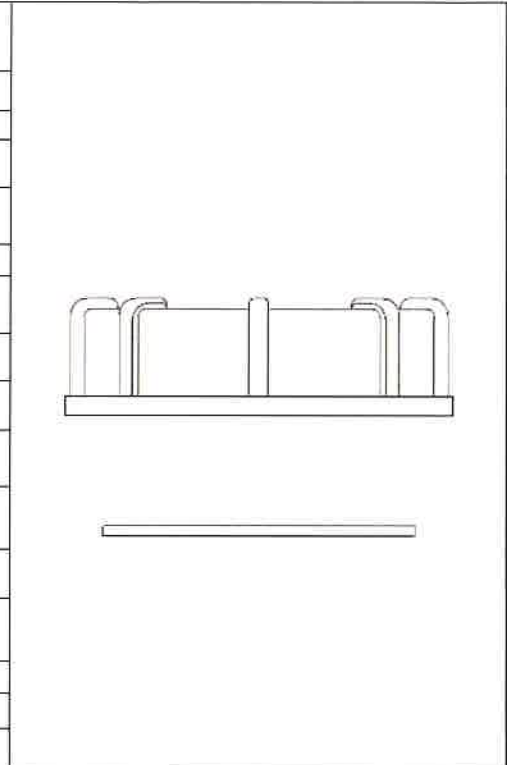

TIGHT HEAD PLASTIC JERRICAN (7947)			
<b>Manufacturer:</b> Priority Plastics, Portland, IN			
<b>Description:</b> 2.5 Gallon Rectangle with Integrated Handle			
<b>Material / Pigment:</b> High Density Polyethylene / Natural			
<b>Method of Manufacturer:</b>	Blow Molded		
<b>Tare Weight:</b>	0.886 Kg		
<b>Capacity:</b>			
• <b>Rated:</b>	2.5 Gallons		
• <b>Overflow:</b>	10.200 Kg (2.69 Gallons)		
<b>Overall Dimensions:</b>			
• <b>Height:</b>	11.29"		
• <b>Length:</b>	9.45"		
• <b>Width:</b>	8.54"		
<b>Finish Dimensions:</b>			
• <b>63mm T</b>	2.415"		
• <b>63mm E</b>	2.272"		
• <b>63mm Neck Height</b>	0.831"		
<b>Wall Thickness:</b>	Body	Top Head	Btm Head
• <b>Minimum</b>	0.040"	0.043"	0.046"
• <b>Minimum from Design Qualification 2018-15</b>	0.050"	0.031"	0.039"
• <b>Material:</b>	High Density Polyethylene		
<b>Markings (QC Audit)</b>	 3H1/Y2.0/100/21 USA/M5105 "2" HDPE Recycling Symbol, Month/ Year Clock, Logo, 2		

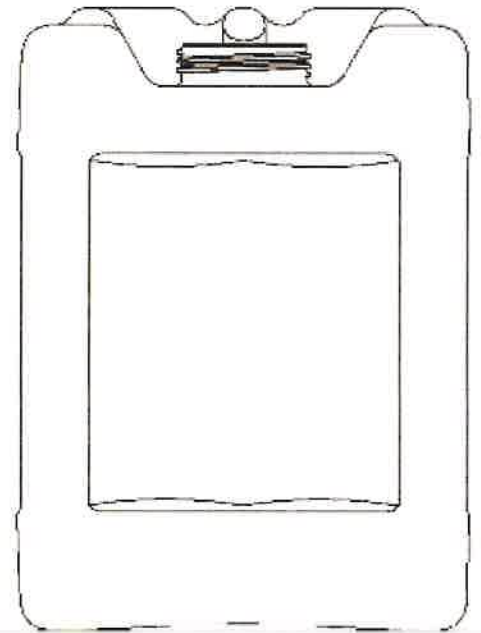


**SECTION III: TEST PROCEDURES AND RESULTS**


**DROP TESTS**

TEST INFORMATION	TEST CRITERIA
<p><b>TEST CONTENTS:</b> Windshield Washer/Antifreeze(0.980SG)</p> <p><b>SAMPLE PREPARATION:</b> REFER TO Section II</p> <p><b>CONDITIONING:</b> -18°C (0°F), Chamber #</p> <p><b>TEST CONTENTS TEMP.:</b> -18.15°C (-0.67°F)</p> <p><b>DROP HEIGHT:</b> 2.0 Meters (79") (Refer to Section IV)</p> <p><b>TEST EQUIPMENT:</b> L.A.B. Accu drop</p>	<ul style="list-style-type: none"> <li>For packaging containing liquid, each packaging does not leak when equilibrium has been reached between the internal and external pressures.</li> <li>Any discharge from a closure is slight and ceases immediately after impact with no further leakage. (§ 178.603)</li> </ul>

**DIAGONAL TOP CHIME DROP TEST SET-UP AND RESULTS**

	Sample #	Results	Comments / Observations
	1	PASS	No leakage or Breakage
	2	PASS	No leakage or Breakage
	3	PASS	No leakage or Breakage


**BOTTOM DIAGONAL CHIME DROP TEST SET-UP AND RESULTS**

	Sample #	Results	Comments / Observations
	5	PASS	No leakage or Breakage
	6	PASS	No leakage or Breakage
	7	PASS	No leakage or Breakage

**LEAKPROOFNESS TESTS**

TEST INFORMATION		TEST CRITERIA
<b>TEST CONTENTS:</b>	Empty	<ul style="list-style-type: none"> <li>A packaging passes the test if there is no leakage of air from the packaging. (§ 178.604)</li> </ul>
<b>CLOSURE APPLICAAION:</b>	Refer to Section II	
<b>CONDITIONING:</b>	Ambient	
<b>TEST PRESSURE:</b>	20.7 kPa (3 PSI)	
<b>TEST DURATION:</b>	5 Minutes	
<b>AREA OF PRESSURIZATION:</b>	Through the Sidewall	
<b>TEST EQUIPMENT:</b>	Regulated Air Source Pressure Monitoring Gauge	

**LEAKPROOFNESS TEST SET-UP & RESULTS**


	Sample #	Results	Comments / Observations
	8	PASS	<b>All three samples maintained the 20.7 kPa test pressure for 5 minutes without leakage.</b>
	9	PASS	
	10	PASS	



**HYDROSTATIC PRESSURE TEST**

TEST INFORMATION		TEST CRITERIA
<b>TEST CONTENTS:</b>	Water	<ul style="list-style-type: none"> <li>For each test sample, there is no leakage of liquid from the package. (§ 178.604)</li> </ul>
<b>FILL CAPACITY:</b>	Maximum Capacity	
<b>CLOSURE APPLICATION:</b>	Refer to Section II	
<b>CONDITIONING:</b>	Ambient	
<b>WATER TEMPERATURE:</b>	74.3°F	
<b>TEST PRESSURE:</b>	100 kPa (14.5 psi)	
<b>TEST DURATION:</b>	30 Minutes	
<b>AREA OF PRESSURATION:</b>	Through the Sidewall	
<b>TEST EQUIPMENT:</b>	Regulated Water Source Pressure Monitoring Gauge	


**HYDROSTATIC PRESSURE TEST SET-UP & RESULTS**

	Sample #	Results	Comments / Observations
	11	PASS	<b>All three samples maintained the 100 kPa test pressure for 30 minutes without leakage.</b>
	12	PASS	
	13	PASS	

**DYNAMIC COMPRESSION TEST RESULTS**

TEST INFORMATION		TEST CRITERIA
<b>TEST CONTENTS:</b>	Empty and Without Closure	<ul style="list-style-type: none"> <li>• After application of the required load, there can be no buckling of the sidewalls sufficient to cause damage to its expected contents.</li> <li>• In no case may the maximum deflection exceed one inch. (§ 178.606)</li> </ul>
<b>SAMPLE PREPARATION:</b>	Refer to Section II	
<b>CONDITIONING:</b>	Ambient	
<b>PRE-LOAD APPLIED:</b>	50 Lbs.	
<b>MINIMUM TEST LOAD REQUIRED:</b>	295.74 Kg (652.01Lbs.) (Refer to Section IV.)	
<b>TEST EQUIPMENT:</b>	TLS(Tech Lab Systems)	

**DYNAMIC COMPRESSION TEST SET-UP & RESULTS**

	Sample #	Load	Deflection	Results
	14	652.01 Lbs.	0.675"	Passed
	15	652.01 Lbs.	0.706"	Passed
	16	652.01 Lbs.	0.674"	Passed

**NOTE:** After meeting the minimum to load requirement of 178.606 ©(2)(ii), each container was taken to failure. Refer to Section VI for the Load vs Deflection Graphs and the maximum compression strength of each test sample.

**REPETITIVE SHOCK VIBRATION TESTS**

<b>TEST INFORMATION</b>		<b>TEST CRITERIA</b>
<b>TEST CONTENTS:</b>	Water	Immediately following the period of vibration, each package must be removed from the platform, turned on its side, and observed for any evidence of leakage. <ul style="list-style-type: none"> <li>• A package passes the vibration test if there is no rupture or leakage from any of the packages.</li> <li>• No test sample should show any deterioration which could adversely affect transportation safety or any distortion liable to reduce packaging strength. (§ 178.608)</li> </ul>
<b>SAMPLE PREPARATION:</b>	Refer to Section II	
<b>CONDITIONING:</b>	Ambient	
<b>TABLE DISPLACEMENT:</b>	1"	
<b>TEST FREQUENCY:</b>	4.0 Hz	
<b>TEST DURATION:</b>	1 Hour	
<b>TEST EQUIPMENT:</b>	Vertical motion using Vibration Tester	

**REGULATORY AND INDUSTRY STANDARD REFERENCES**

<b>REGULATORY REFERENCES</b>	
<b>TEST</b>	<b>49 CFR 2020 EDITION</b>
<b>Drop:</b>	178.603
<b>Leakproofness:</b>	178.604
<b>Hydrostatic Pressure:</b>	178.605
<b>Stack:</b>	178.606
<b>Vibration:</b>	178.608

1. United States Department of Transportation Code of Federal Regulations (CFR) Title 49, Transportation, Parts 100-185

**SECTION IV: MATEMATICAL CALCULATIONS**

**INFORMATION USED FOR CALCULATIONS**

Overall Packaged Tare Weight (PTW):	.916 Kg (2.01 Lbs.)	<u>WW/A SG</u>
Overflow Capacity (OFC) :		<u>SG: 0.980</u>
Windshield Washer/Antifreeze	10.060 Kg	
Water	10.315 Kg	2.69 Gallons (GAL)
Packing Group:	II	
Product Specific Gravity (PSG):	2.0	
Packing Group Multiplication Factor (MF):	1.00	
Nesting Height of one Package (NH):	11.433 Inches	
Stack Test # of Samples Tested Simultaneously:	0	

**98% OF OVERFLOW**

Overflow Capacity (OFC) x 98%

<u>OFC</u> x <u>98%</u>		
10.060 x 98% =	<b>9.858 Kg</b>	<b>WW/A</b>
10.315 x 98% =	<b>10.108 Kg</b>	<b>Water</b>

**PACKAGED TEST WEIGHT**

Overall Pkg Tare Weight (PTW) + 98% Overflow Capacity (OFC)

<u>PTW</u> + <u>98% OFC =</u>		
0.916 + 9.858	<b>10.774 Kg</b>	<b>23.752 Lbs. WW/A</b>
0.916 + 10.108	<b>11.024 Kg</b>	<b>24.303 Lbs. Water</b>

**CALCULATED PACKAGE GROSS MASS (CPGM)**




Overall Pkg Tare Weight (PTW) + (Product SG(PSG) x 98% Overflow (OFC))

<u>PTW</u> + <u>(PSG</u> x <u>98% OFC)</u>		
.916 + 2.0 x 10.108		
	<b>21.132 Kg</b>	<b>46.588 Lbs.</b>

DROP HEIGHT CALCULATION (FOR SPECIFIC GRAVITIES EXCEEDING 1.2)					
Product Specific Gravity (PSG) x Packing Group Multiplication Factor (MF)					
<u>PSG</u>	x	<u>MF</u>	<u>Packing Group: II</u>		
2.0	x	1.00	<u>Required Drop Height</u>	<u>Actual Drop Height</u>	
		2.0 Meter	78.74 Inches	79 Inches	

DYNAMIC COMPRESSION TEST LOAD CALCULATIONS					
<b>Dynamic Compression Test Load Calculation</b>					
<b>Where</b>					
A= Applied Load in Lbs.					
n = Minimum number of containers that, when stacked reach a height of 3m(118 inches)					
(See Calculation below)					
s = Product Specific Gravity—(PSG)					
w = Overall package tare weight (Lbs.)					
v = Maximum Container Capacity (Gal.)					
8.3 = Weight in pounds of 1 gallon of water					
1.5 = Compensation factor that converts the static load of the stacking test into a load suitable for Dynamic Compression Testing					
$\frac{A}{544.94 \text{ Lbs.}} = \frac{n \times (w + (s \times v \times 8.3 \times 0.98)) \times 1.5}{9.33 \times 2.01 \times 2.0 \times 2.27 \times 8.3 \times 0.98 \times 1.5}$					
$247.180 \text{ Kg} \qquad 544.94 \text{ Lbs.}$					
<b>Minimum Required Top Load Used in Design Qualification Testing x 1.5 Compensation Factor*</b>					
Top Load used in Design Qualification Testing: 117.17 Kg x 1.5 = 295.76 Kg 652.03 Lbs.					
Minimum Required Top Load					
<b>n = Number of Packages in a 3m high Stack (118/Nesting Height (NH) – 1)</b>					
118.11/Nesting Height of one Pkg (NH) – 1					
$\frac{(118.11 / 11.433) - 1}{11.433 - 1} = \frac{n}{9.33}$					

**SECTION V: INDIVIDUAL LOAD VS. DEFLECTION GRAPHS AND DATA**

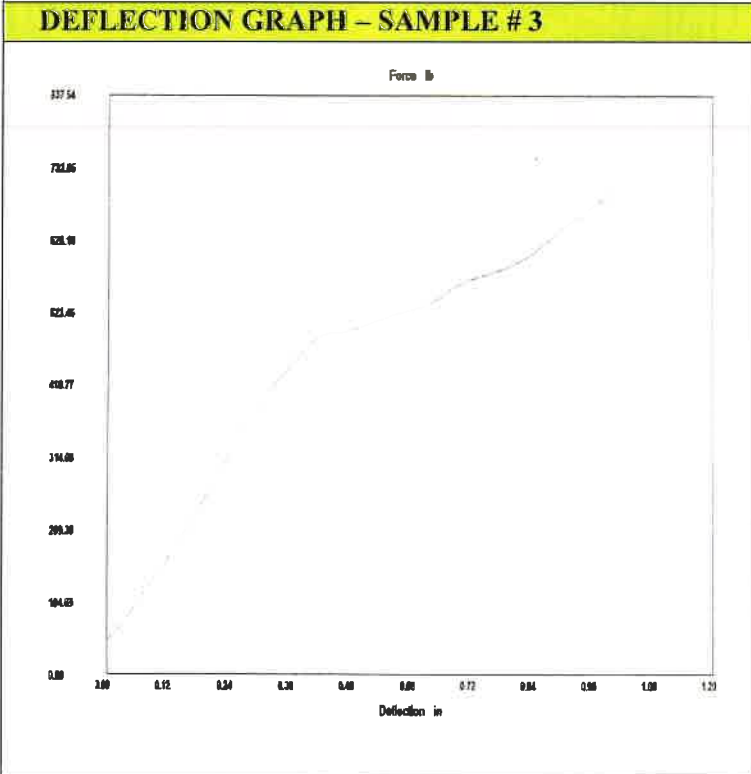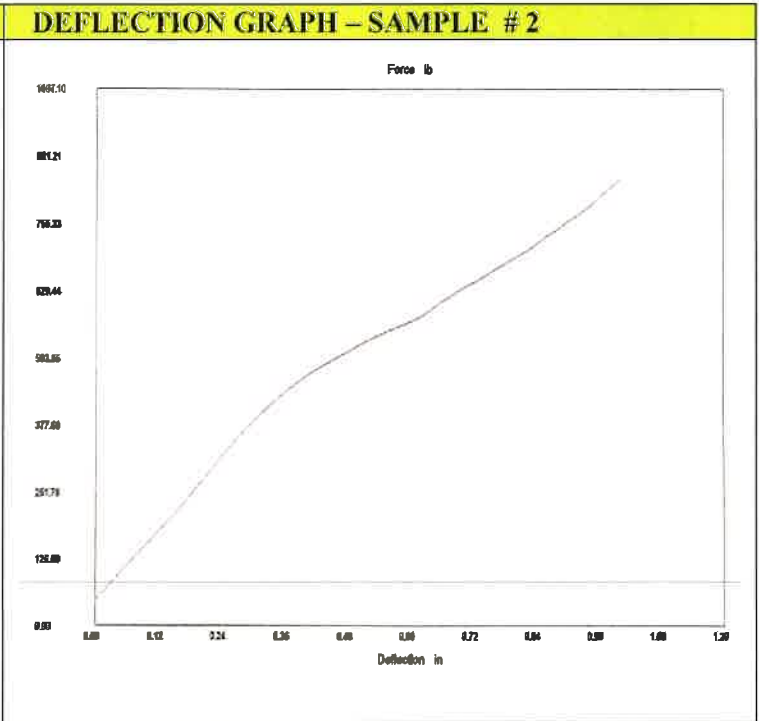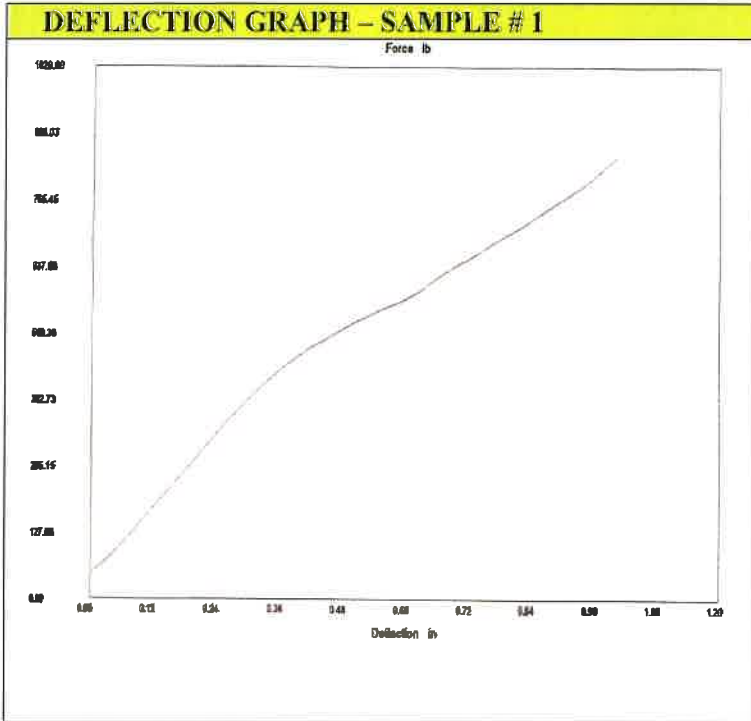

**MAXIMUM LOAD VS. DEFLECTION**

Sample #	Maximum Load – Lbs.	Deflection – Inch
14	850.50 Lbs.	1.00"
15	839.25 Lbs.	1.00"
16	697.95 Lbs.	1.00"



Corporate Office  
500 Industrial Park Dr.  
Portland IN 47371  
Tel 260.726.7000 Fax 260.726.8111

Date Created:  
Updated to New Format: 7.30.2019

## Closing Instructions for 2.5 Gallon Containers

Caps that this closing instruction includes are:

Priority Plastics 63mm cap manufactured by Miami Valley Plastics is 8728-201-060 (63mm Cap W/Sure Seal 222 Slick on both sides of gasket.)



Step 1. Ensure the gasket is in the 63mm closure.



Step 2. Turn the 63mm cap to get started over the threads of the 63mm neck.



Step 3. Place an overcap fixture over the 63mm cap.



Step 4. Torque the cap to 150 in-lbs.

NOTE: Priority Plastics, Inc. certifies that these containers have been manufactured and certified in accordance with Performance Requirements of Part 178 Subpart M of title 49CFR. The chemical filler and the shipper may rely upon the marking as certification that the package meets the applicable UN performance standards. The shipper is responsible for ensuring the product is authorized in the package and must consult and General Shipper Requirements, including modal requirements. To meet UN standards, the package must be properly closed for shipment. Failure to follow the closure instructions or substitution of packaging components other than those identified in the closure instructions will render the UN Certification invalid.