


**DOT/UNITED NATIONS
Performance Oriented Packaging Certification**



3H1 PERIODIC RETEST

**7947 2.5 Gallon Rectangle 63mm
NoVent- Group II
HDPE**

Test Report #: 2020-12



3H1/Y1.6/150/
USA /M5105**

****Insert year the packaging is manufactured**

TESTING PERFORMED FOR:

PRIORITY PLASTICS, INC.
500 Industrial Park Rd.
Portland, IN 47371

TESTING PERFORMED BY:

Priority Plastics, Inc.
500 Industrial Park Rd.
Portland, IN 47371
Phone: (260) 726-7000
Fax: (260) 726-8111

Certification Date: 03/24/2020
Re-Certification Date: 03/24/2021

TABLE OF CONTENTS

Section I: CERTIFICATION.....3

Section II & V: PACKAGING DESCRIPTION / COMPONENT DRAWINGS.....4

Section III: TEST PROCEDURES AND RESULTS.....7

DROP TESTS..... 7

LEAKPROOFNESS TEST.....8

HYDROSTATIC PRESSURE TEST.....9

DYNAMIC COMPRESSION TEST.....10

REPETITIVE SHOCK VIBRATION TESTS.....11


REGULATORY AND INDUSTRY STANDARD REFERENCES.....12

Section IV: MATHEMATICAL CALCULATIONS.....13

SECTION I: Certification

Periodic Retest
 2.5 Gallon Rectangle HDPE Packaging (HDPE Resin)

Priority Plastics, Inc. certifies that the packaging referenced above has passed the standards of the DEPARTMENT OF TRANSPORTATION'S TITLE 49 CFR; Performance Oriented Packaging Standards, Section 178. It is the responsibility of the end user to determine authorization for use under these regulations. The use of other packaging methods or components other than those documented in this report may render this certification invalid.

SUMMARY OF PERFORMANCE TESTS					
UN/DOT TEST	CFR REFERENCE	TEST LEVEL	TEST CONTENTS	TEST COMPLETED	TEST RESULTS
Drop	178.603	1.6 m	Windshield Fluid/Antifreeze Coolant 50/50 Diluted (WW?A)	March 24, 2020	PASS
Leakproofness	178.604	20 kPa – 5 Min. 3 PSI	Empty	March 23, 2020	PASS
Hydrostatic	178.605	150 kPa – 30 Min.	Water	March 23, 2020	PASS
Stacking/ Dynamic Compression	178.606	534.2 lbs	Water	March 23, 2020	PASS
Vibration	178.608	1.6mm – 1 Hr	Water	March 23, 2020	PASS
TEST REPORT NUMBERS: 2018-15, 2019-14, 2020-12					
UN MARKING: (CFR 49 – 178.503)				3H1/Y1.6/150/** USA /M5105	
PACKAGING IDENTIFICATION CODE:			3H1 (178.509)		
PERFORMANCE STANDARD:			Y (Packaging meets Packing Group II test)		
MAXIMUM PRODUCT SPECIFIC GRAVITY:			1.6		
INTERNAL TEST PRESSURE:			150 kPa		
YEAR OF MANUFACTURE:			**Insert year the packaging is manufactured		
STATE AUTHORIZING THE MARK:			USA		
PACKAGING CERTIFICATION AGENCY:			(M5105) Priority Plastics, Inc.		
PACKAGE IDENTIFICATION:			M5105		
PERIODIC RETEST DATE:			March 24, 2021		

In the event of future changes to the above referenced test standard, it is the responsibility of Priority Plastics to determine whether additional testing or updating of past testing is necessary to verify that the packaging tested remains in compliance with those standards.

MANUFACTURER:


Priority Plastics, Inc.
 500 Industrial Park Road
 Portland, IN 47371



Donna Noll
 Quality Manager
 Priority Plastics, Inc.
 500 Industrial Park Rd
 Portland, IN 47371

SECTION II: PACKAGING DESCRIPTION / COMPONENTS

2.5 Gallon Rectangle, No Vent, HDPE Packaging

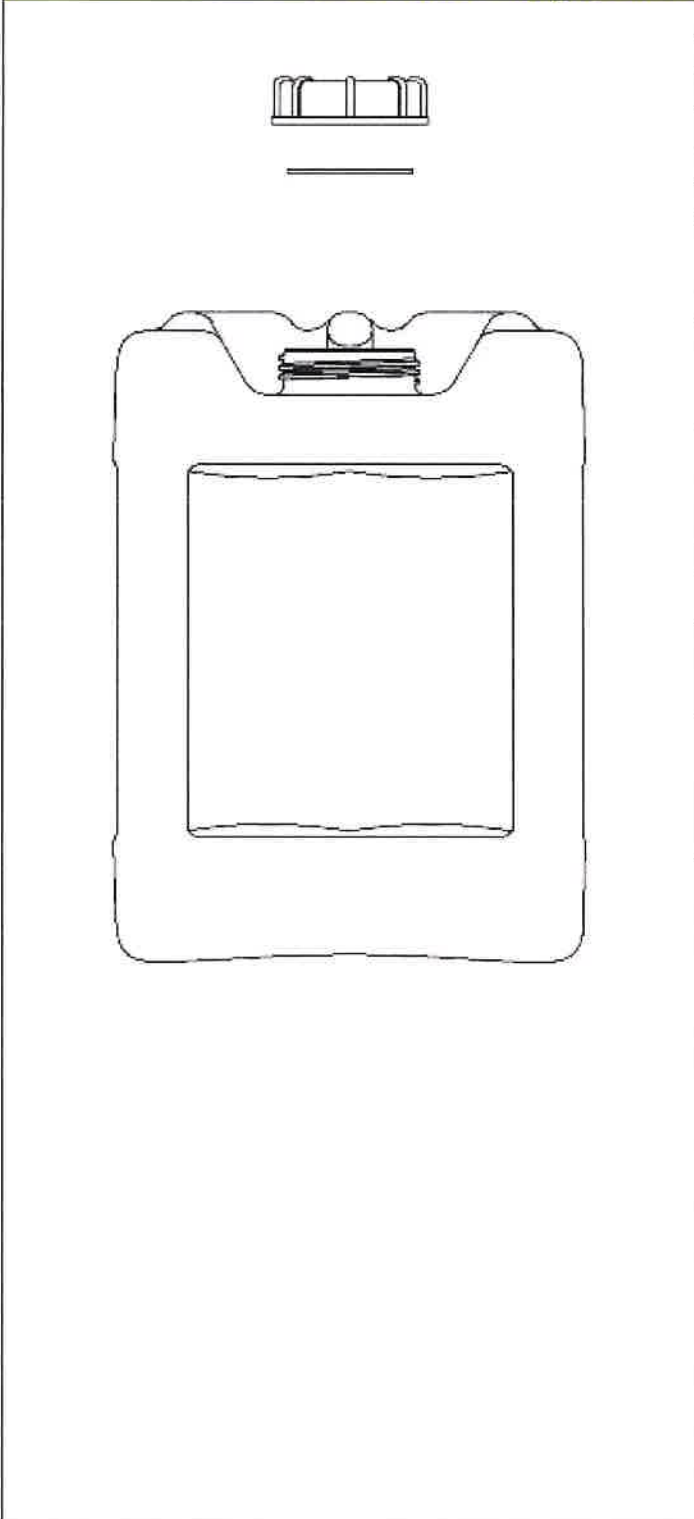


Certification Type:	Periodic Retest
Packaging Code Designation:	3H1
Packing Group:	II
Specific Gravity:	1.6
Hydrostatic Pressure:	150 kPa
TEST SAMPLE PREPARATION (Refer to Section IV)	
Overall Package Tare Weight: 0.674 Kg	
Fill Capacity (98% Overflow):	
• WW/A	10.192 Kg
• Water	10.388 Kg
Package Test Weight:	
• WW/A:	10.866 Kg
• Water	11.362 Kg
Calculated Package Gross Mass: 17.3 Kg (38.1 Lbs.)	
CLOSING METHODS	
Application Torque for 63mm Cap: 150- 160 In-Lbs.	
Equipment for 63mm Cap: GP-045,GP-052 & V-GP-064-A	


COMPONENT INFORMATION


CLOSURE (8728-204-060)

Manufacturer: Miami Valley Plastics, Eldorado, OH

Description: 63MM Cap with 3/4" NPT and EPDM Gasket	
Priority Item Number:	8728-204-060
Tare Weight:	28.52 Grams
Closure Overall Dimensions:	
• Height	0.862"
• Diameter	2.895"
Finish Dimensions:	
• T	2.437"
• E	2.324"
Markings (QC Audit):	2, 8 ribs around the outside
Liner/Gasket	55 Durometer White EPDM
Identification:	None
Height Thickness:	0.070"
Diameter:	2.300"

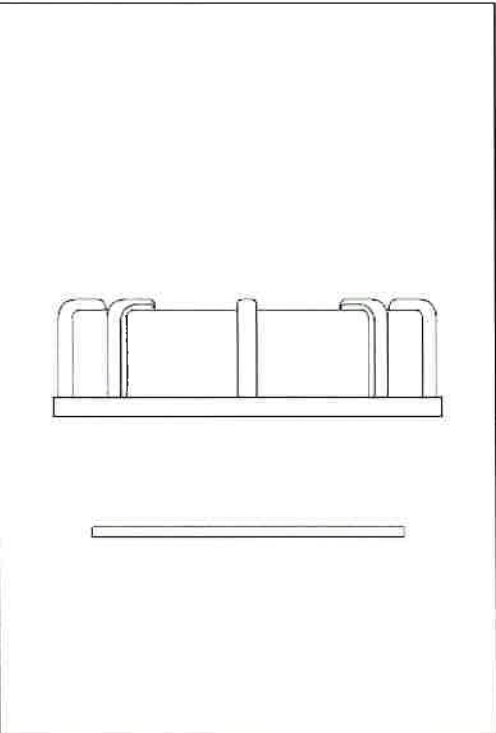

TIGHT HEAD PLASTIC JERRICAN (7947)			
Manufacturer: Priority Plastics, Portland, IN			
Description: 2.5 Gallon Rectangle with Integrated Handle			
Material /Pigment: High Density Polyethylene /Natural			
Method of Manufacturer:	Blow Molded		
Tare Weight:	0.645 Kg		
Capacity:			
• Rated:	2.5 Gallons		
• Overflow:	10.600 Kg (2.797 Gallons)		
Overall Dimensions:			
• Height:	11.530"		
• Length:	9.197"		
• Width:	8.368"		
Finish Dimensions:			
• 63mm T	2.426"		
• 63mm E	2.282		
• 63mm Neck Height	0.851"		
Wall Thickness:	Body	Top Head	Btm Head
• Minimum	0.036	0.029"	0.040"
• Minimum from Design Qualification 2018-15	0.033"	0.026"	0.038"
Material: High Density Polyethylene			
Markings (QC Audit)	 3H1/Y1.6/150/20 USA/M5105 "2" HDPE Recycling Symbol, Month/ Year Clock, 3, WWW.PRIORITYPLASTICS.COM		

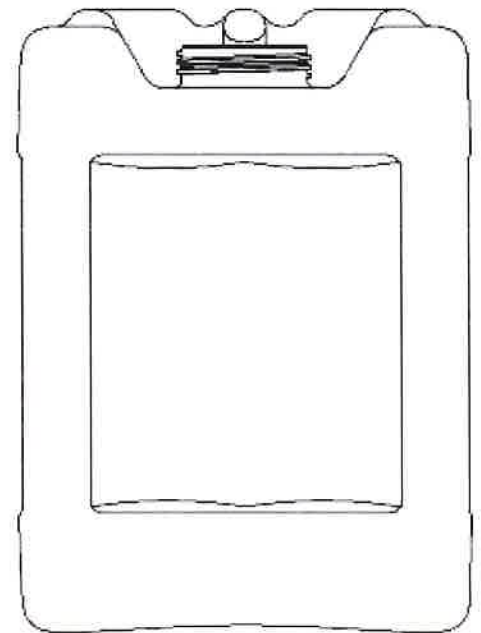


SECTION III: TEST PROCEDURES AND RESULTS


DROP TESTS

TEST INFORMATION	TEST CRITERIA
<p>TEST CONTENTS: Windshield Washer/Antifreeze(0.984SG)</p> <p>SAMPLE PREPARATION: REFER TO Section II</p> <p>CONDITIONING: -18°C (0°F), Chamber #</p> <p>TEST CONTENTS TEMP.: -18.35°C (-1.03°F)</p> <p>DROP HEIGHT: 1.6 Meters (63") (Refer to Section IV)</p> <p>TEST EQUIPMENT: L.A.B. Accu drop</p>	<ul style="list-style-type: none"> For packaging containing liquid, each packaging does not leak when equilibrium has been reached between the internal and external pressures. Any discharge from a closure is slight and ceases immediately after impact with no further leakage. (§ 178.603)

DIAGONAL TOP CHIME DROP TEST SET-UP AND RESULTS

	Sample #	Results	Comments / Observations
	1	PASS	No leakage or Breakage
	2	PASS	No leakage or Breakage
	3	PASS	No leakage or Breakage


FLAT ON SIDE, NECK DOWN SIDE DROP TEST SET-UP AND RESULTS

	Sample #	Results	Comments / Observations
	6	PASS	No leakage or Breakage
	7	PASS	No leakage or Breakage
	8	PASS	No leakage or Breakage

LEAKPROOFNESS TESTS

TEST INFORMATION		TEST CRITERIA
TEST CONTENTS:	Empty	<ul style="list-style-type: none"> A packaging passes the test if there is no leakage of air from the packaging. (§ 178.604)
CLOSURE APPLICAAION:	Refer to Section II	
CONDITIONING:	Ambient	
TEST PRESSURE:	20.7 kPa (3 PSI)	
TEST DURATION:	5 Minutes	
AREA OF PRESSURIZATION:	Through the Sidewall	
TEST EQUIPMENT:	Regulated Air Source Pressure Monitoring Gauge	


LEAKPROOFNESS TEST SET-UP & RESULTS

	Sample #	Results	Comments / Observations
	9	PASS	All three samples maintained the 20.7 kPa test pressure for 5 minutes without leakage.
	10	PASS	
	11	PASS	

HYDROSTATIC PRESSURE TEST

TEST INFORMATION		TEST CRITERIA
TEST CONTENTS:	Water	<ul style="list-style-type: none"> For each test sample, there is no leakage of liquid from the package. (§ 178.604)
FILL CAPACITY:	Maximum Capacity	
CLOSURE APPLICATION:	Refer to Section II	
CONDITIONING:	Ambient	
TEST PRESSURE:	150 kPa (21.76 psi)	
TEST DURATION:	30 Minutes	
AREA OF PRESSURATION:	Through the Sidewall	
TEST EQUIPMENT:	Regulated Water Source Pressure Monitoring Gauge	

HYDROSTATIC PRESSURE TEST SET-UP & RESULTS

	Sample #	Results	Comments / Observations
	12	PASS	All three samples maintained the 150 kPa test pressure for 30 minutes without leakage.
	13	PASS	
	14	PASS	

DYNAMIC COMPRESSION TEST RESULTS

TEST INFORMATION		TEST CRITERIA
TEST CONTENTS:	Empty and Without Closure	<ul style="list-style-type: none"> • After application of the required load, there can be no buckling of the sidewalls sufficient to cause damage to its expected contents. • In no case may the maximum deflection exceed one inch. (§ 178.606)
SAMPLE PREPARATION:	Refer to Section II	
CONDITIONING:	Ambient	
PRE-LOAD APPLIED:	50 Lbs.	
MINIMUM TEST LOAD REQUIRED:	242.55 Kg (534.7 Lbs.) (Refer to Section IV.)	
TEST EQUIPMENT:	TLS(Tech Lab Systems)	

DYNAMIC COMPRESSION TEST SET-UP & RESULTS


	Sample #	Load	Deflection	Results
	21	534.7 Lbs.	0.992"	Passed
	22	534.7 Lbs.	0.937"	Passed
	23	534.7 Lbs.	0.891"	Passed

NOTE: After meeting the minimum to load requirement of 178.606 ©(2)(ii), each container was taken to failure. Refer to Section VI for the Load vs Deflection Graphs and the maximum compression strength of each test sample.

REPETITIVE SHOCK VIBRATION TESTS

TEST INFORMATION		TEST CRITERIA
TEST CONTENTS:	Water	Immediately following the period of vibration, each package must be removed from the platform, turned on its side, and observed for any evidence of leakage. <ul style="list-style-type: none"> • A package passes the vibration test if there is no rupture or leakage from any of the packages. • No test sample should show any deterioration which could adversely affect transportation safety or any distortion liable to reduce packaging strength. (§ 178.608)
SAMPLE PREPARATION:	Refer to Section II	
CONDITIONING:	Ambient	
TABLE DISPLACEMENT:	1"	
TEST FREQUENCY:	4.0 Hz	
TEST DURATION:	1 Hour	
TEST EQUIPMENT:	Vertical motion using Vibration Tester	

VIBRATION TEST SET-UP & RESULTS

	Sample #	Results	Comments / Observations
	24	PASS	No leakage or damage.
	25	PASS	
	26	PASS	

REGULATORY AND INDUSTRY STANDARD REFERENCES

REGULATORY REFERENCES	
TEST	49 CFR 2019 EDITION
Drop:	178.603
Leakproofness:	178.604
Hydrostatic Pressure:	178.605
Stack:	178.606
Vibration:	178.608

1. United States Department of Transportation Code of Federal Regulations (CFR) Title 49, Transportation, Parts 100-185

SECTION IV: MATHEMATICAL CALCULATIONS

INFORMATION USED FOR CALCULATIONS

Overall Packaged Tare Weight (PTW):	.674 Kg (1.5 Lbs.)	<u>WW/A SG</u>
Overflow Capacity (OFC) :		SG: 0.984
Windshield Washer/Antifreeze	10.400 Kg	
Water	10.600Kg	2.8 Gallons (GAL)
Packing Group:	II	
Product Specific Gravity (PSG):	1.6	
Packing Group Multiplication Factor (MF):	1.00	
Nesting Height of one Package (NH):	11.530 Inches	
Stack Test # of Samples Tested Simultaneously:	0	

98% OF OVERFLOW

Overflow Capacity (OFC) x 98%

<u>OFC</u>	x	<u>98%</u>		
10.400	x	98% =	10.192 Kg	WW/A
10.600	x	98% =	10.388 Kg	Water

PACKAGED TEST WEIGHT

Overall Pkg Tare Weight (PTW) + 98% Overflow Capacity (OFC)

<u>PTW</u>	+	<u>98% OFC =</u>		
.674	+	10.192	10.866 Kg	23.955 Lbs. WW/A
.674	+	10.388	11.062 Kg	24.387 Lbs. Water

CALCULATED PACKAGE GROSS MASS (CPGM)




Overall Pkg Tare Weight (PTW) + (Product SG(PSG) x 98% Overflow (OFC))

<u>PTW</u>	+	<u>(PSG</u>	x	<u>98% OFC)</u>	
.674	+	1.6	x	10.388	
					17.3 Kg
					38.1 Lbs.

DROP HEIGHT CALCULATION (FOR SPECIFIC GRAVITIES EXCEEDING 1.2)				
Product Specific Gravity (PSG) x Packing Group Multiplication Factor (MF)				
PSG	x	MF	<u>Required Drop Height</u>	<u>Actual Drop Height</u>
1.6	x	1.00	62.99 Inches	63.0 Inches
		1.60 Meter		

DYNAMIC COMPRESSION TEST LOAD CALCULATIONS	
Dynamic Compression Test Load Calculation	
Where	
A= Applied Load in Lbs.	
n = Minimum number of containers that, when stacked reach a height of 3m(118 inches) (See Calculation below)	
s = Product Specific Gravity—(PSG)	
w = Overall package tare weight (Lbs.)	
v = Maximum Container Capacity (Gal.)	
8.3 = Weight in pounds of 1 gallon of water	
1.5 = Compensation factor that converts the static load of the stacking test into a load Suitable for Dynamic Compression Testing	
$\frac{A}{525.852 \text{ Lbs.}}$	$\frac{n \times (w + (s \times v \times 8.3 \times 0.98)) \times 1.5}{9.24 \times 1.5 \times 1.6 \times 2.8 \times 8.3 \times 0.98 \times 1.5}$
	238.522 Kg 525.852 Lbs.
Minimum Required Top Load Used in Design Qualification Testing x 1.5 Compensation Factor*	
Top Load used in Design Qualification Testing: 161.5 Kg x 1.5 = 242.3Kg 534.2 Lbs. Minimum Required Top Load	
n = Number of Packages in a 3m high Stack (118/Nesting Height (NH) – 1)	
118.11/Nesting Height of one Pkg (NH) – 1	
$\frac{(118.11}{118.11} / \frac{NH}{11.53} - \frac{1}{1} = \frac{n}{9.24}$	

SECTION V: INDIVIDUAL LOAD VS. DEFLECTION GRAPHS AND DATA

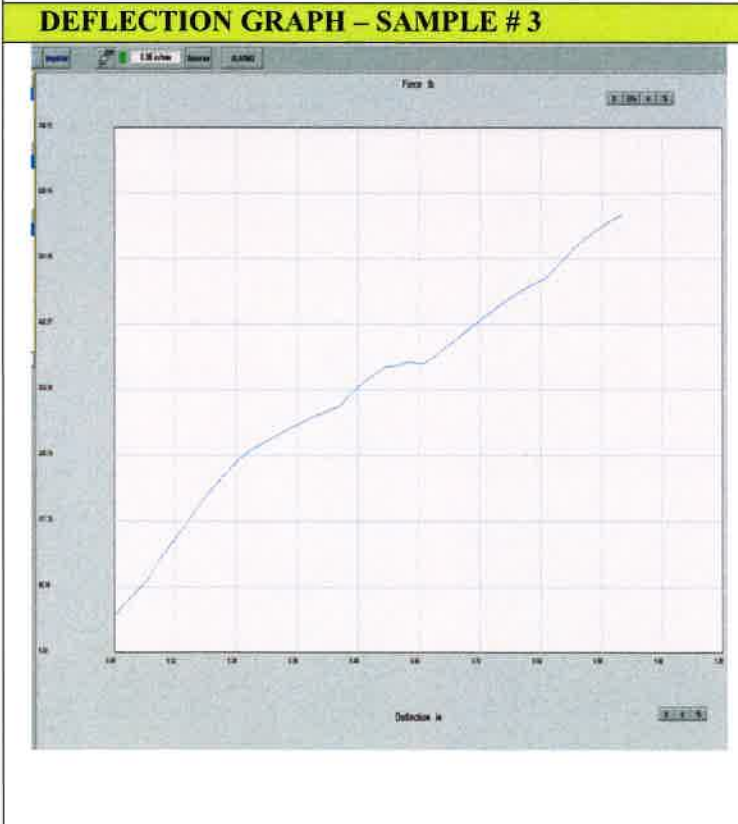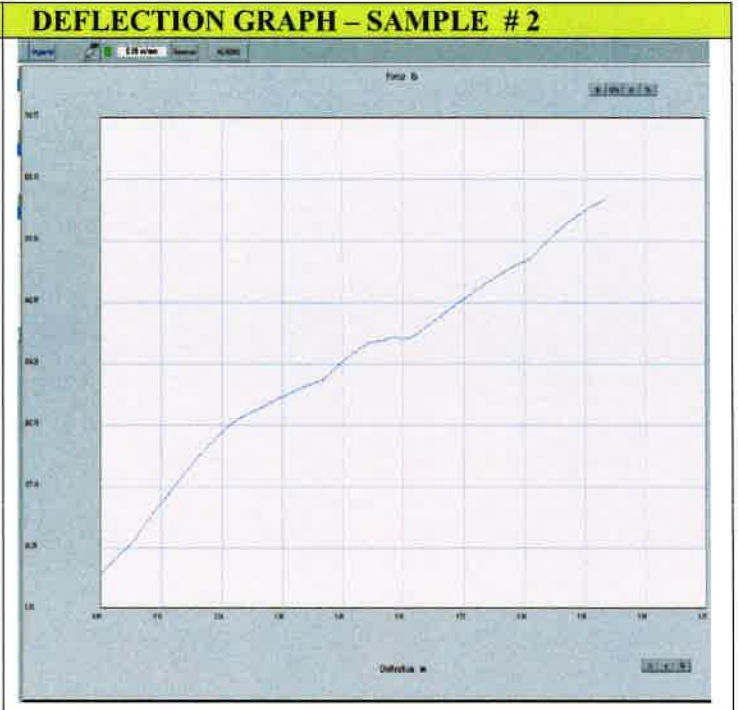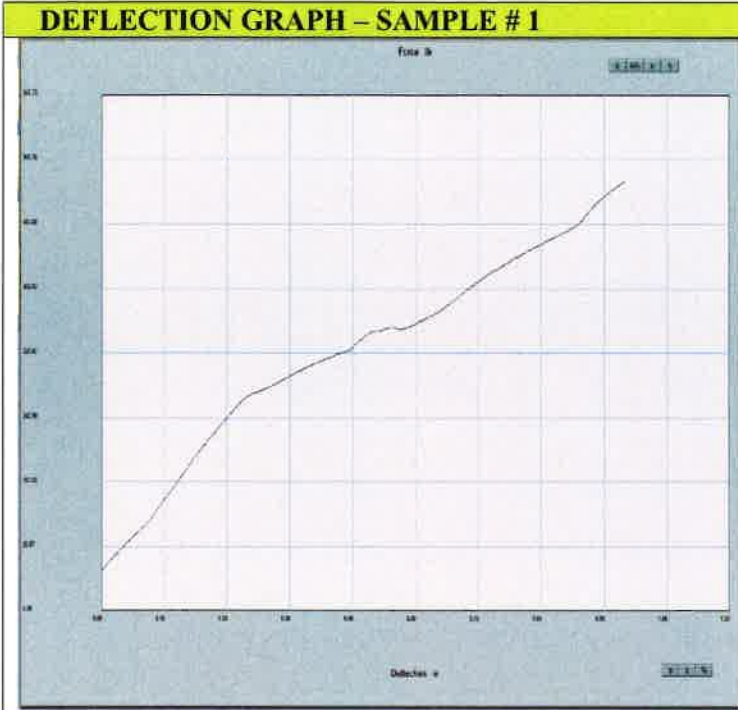

MAXIMUM LOAD VS. DEFLECTION

Sample #	Maximum Load – Lbs.	Deflection – Inch
21	539.77 Lbs.	1.0”
22	566.77 Lbs.	1.0”
23	590.638 Lbs.	1.0”



Corporate Office
 500 Industrial Park Dr.
 Portland IN 47371
 Tel 260.726.7000 Fax 260.726.8111

Date Created:
 Updated to New Format: 8.08.2019

Closing Instructions for 2.5 Gallon Containers

Caps that this closing instruction includes are:

Priority Plastics 63mm cap manufactured by Miami Valley Plastics is 8728-204-060 (63mm Cap W/EPDM gasket.)



Step 1. Ensure the gasket is in the 63mm closure.

Step 2. Turn the 63mm cap to get started over the threads of the 63mm neck.

Step 3. Place an overcap fixture over the 63mm cap.

Step 4. Torque the cap to 150-160 in-lbs.

NOTE: Priority Plastics, Inc. certifies that these containers have been manufactured and certified in accordance with Performance Requirements of Part 178 Subpart M of title 49CFR. The chemical filler and the shipper may rely upon the marking as certification that the package meets the applicable UN performance standards. The shipper is responsible for ensuring the product is authorized in the package and must consult and General Shipper Requirements, including modal requirements. To meet UN standards, the package must be properly closed for shipment. Failure to follow the closure instructions or substitution of packaging components other than those identified in the closure instructions will render the UN Certification invalid.